

Specialty Materials™

THE BEST GARMENT DECORATION PRODUCTS



LOVE what you PRESS!



ColorJET Media™

Digital Media for Textile Transfers

Designed for Solvent/Eco-Solvent, Aqueous and Pigmented inks.

Solvent Printable CJM-2265

Semi-gloss finish, printable with all solvent/ecosol printers. Produces brilliant colorful images and has a soft hand. Available in 24" and 50" widths.

Applications

Cotton, Uncoated Polyester, Fabric blends



45° Blade



Print and cut
this material
"right-reading"



Use TM-853 to remove
image from paper
backing and transfer
image to the garment



302°F - 338°F



Firm,
even
pressure



10-15
seconds




Peel cold



Wash inside-out,
cold water, delicate
cycle, tumble dry low.

**No nylon, dazzle cloth, shiny polyester, or moisture-wicking materials.
Make sure that the print is thoroughly dry before masking!**

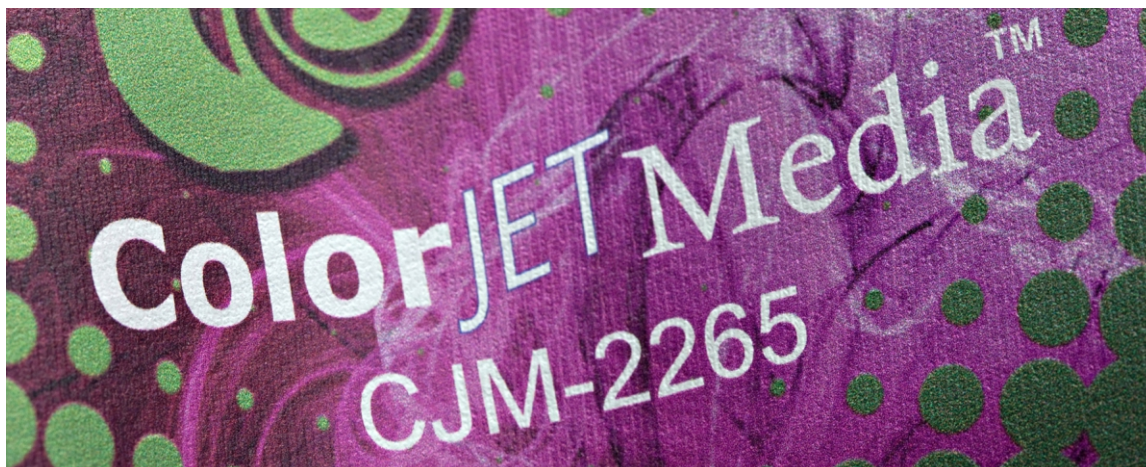

**Caution: Printable media is very sensitive. Always handle with care,
with clean hands. Always store the roll in a plastic bag, protected from dust.**

Multi-Ink Dark CJM-2275 - CPSIA Certified

Semi-gloss finish for dark colored fabrics. Printable using Solvent, Aqueous, and Pigmented inks, and produces brilliant colorful images. Available in 17", 24" and 50" widths. Press with the back of the release liner to obtain a glossy finish.

Applications

Cotton, Uncoated Polyester, Fabric blends



45° Blade



Print and cut this material "right-reading"



Use DTM-855 to remove image from paper backing and transfer image to the garment



302°F - 338°F



Medium, even pressure



20-30 seconds



Peel cold



Wait 24 hours before washing. Wash inside out, cold water, gentle cycle, tumble dry low.

No nylon, dazzle cloth, shiny polyester, or moisture-wicking materials. Make sure that the print is thoroughly dry before masking!

Multi-Ink Light CJM-2285 - CPSIA Certified

Matte finish for light and white colored fabrics. Creates a screen printed look. Printable using Solvent, Aqueous, and Pigmented inks, and produces brilliant colorful images. Available in 17", 24" and 50" widths.

Applications

Cotton, Uncoated Polyester, Fabric blends



45° Blade



Print and cut this material mirror image



No transfer mask necessary



345°F



Medium, even pressure



30-40 seconds



Peel cold



Wait 24 hours before washing. Wash inside out, cold water, gentle cycle, tumble dry low.

No nylon, dazzle cloth, shiny polyester, or moisture-wicking materials.

Please make sure this material is free from dust and debris before printing. This can be accomplished by wiping material with a dry cloth.

Technical Support: Toll Free: 877-437-8556 | SpecialtyMaterials.com

All technical information and recommendations are based on tests we believe to be reliable. However, we cannot guarantee performance for conditions not under manufacturer's control. Before using, please determine the suitability of product for its intended use. The user assumes all risk and liability whatsoever in connection with the use of this product. Seller's and manufacturer's only obligation shall be to replace such quantity of the product proved to be defective by manufacturer.

Copyright © 2014, Specialty Materials & Digital Decoration, LLC. All rights reserved. 2929 W. 21st Street, Tulsa, OK 74107